EX-6514E

PCI FireWire 1394A

Anwendung / Application

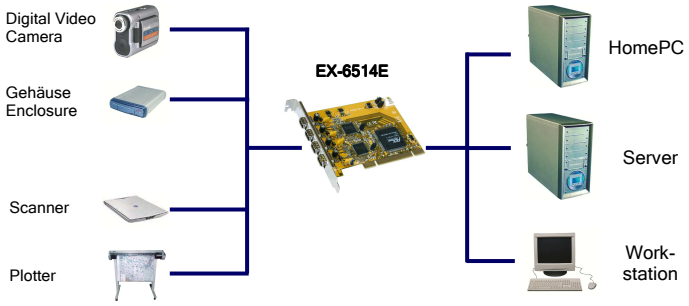

„Dual Chip“ FireWire 1394A PCI Karte mit 4 Externen Ports (TI Chip-Set)

Beschreibung

Die EX-6514E „**Dual Chip“** PCI FireWire 1394A (FireWire400) Karte stellt vier externe FireWire 1394A Port zur Verfügung. Zwei Ports haben einen eigenen Texsas Instruments Singel Chip. Somit erreicht jeder Port eine volle Datenübertragung von bis 200 Megabit pro Sekunde. Sie ist entwickelt worden um vier weitere FireWire 1394A Highspeeds Ports für PCs, kleine Workstations oder Server über den PCI -Bus zu erweitern um FireWire 400 1394A Geräte anzuschließen

Merkmale

- Unterstützt bis zu 63 Geräte
- PCI Express Schnittstelle kompatibel zu 1.0a Spezifikation
- „Hot swapping“ Geräte können ohne den Computer auszuschalten eingesteckt und ausgezogen werden
- Kann auch zusätzlich zu den FireWire Ports vom Motherboard installiert werden
- Unterstützt PC und Apple Power MAC Systeme

Spezifikationen

- **Chip-Set:** Texas Instrument
- **Datentransfer-Rate:** FireWire 1394A: 400Mbps
- **Anschlüsse**: 4 x 6 Pin FireWire 1394A Buchse Extern
  5/12V Power Stecker für den Stromanschluss vom PC
- **Hardwaresysteme:** PCI- oder PCI-X Bus (32/64-Bit)
- **Treiber:** Vom OS zur Verfügung gestellt
- **Betriebssysteme:** Win2000/XP/Vista/Server(2000, 2003&2008)/Win7/ Mac OS 10.x, Linux
- **Betriebstemperatur :** 0^0 bis 55^0 Celsius
- **Lagertemperatur:** -40^0 bis 75^0 Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 120 x 90 mm
- **Gewicht**: 400g
- **Lieferumfang**: EX-6514E, Handbuch

“Dual Chip” FireWire 1394A PCI card with 4 external ports (TI)

Description

The EX-6514E **“Dual Chip”** PCI IEEE1394a (FireWire400) card provides four external ports for a reliable solution for PC computers to connect to IEEE1394a (FireWire400) peripherals. The PCI bus interface is connected to two OHCI 1.1 Compliant IEEE 1394a Single Chip Host Controller (TSB43AB22A). This solution provides full PCI and dual 1394a functionality and performance. The EX-6514E provides a true high performance I/O solution for users are demanding the IEEE1394a consumer and professional devices.

Features

- Support up to 63 device
- Fully Compliant with PCI Express Base Specifications, Revision 1.0a
- “Hot swapping” to connect/disconnect devices without turning off the computer
- Can install to existing FireWire ports from the Motherboard
- Support PC and Apple Power MAC Systems

Specifications

- **Chip-Set:** Texas Instruments
- **Data transfer rate:** FireWire 1394A: 400Mbps
- **Connectors**: 4 x external 6 pin FireWire 1394A female
  5/12V Power connector for the power from PC
- **Hardware system:** PCI- or PCI-X Bus (32/64-Bit
- **Driver:** Provided by operating system
- **Operating systems:** Win2000/XP/Vista/Server(2000, 2003&2008)/Win7/ Mac OS 10.x, Linux
- **Operating Temperature :** 32^0 up to 131^0 Fahrenheit
- **Storage Temperature:** -40^0 up to 167^0 Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 120 x 90 mm
- **Weight**: 400g
- **Packaging contents**: EX-6514E, Manual

System / OS

Windows, Linux, Mac OS X

Geprüft / Approved

CE FC RoHS DE97424562

Verpackung / Packaging